


DL-852T28B

2MP H.265 IP 1080P WDR
IR DOME POE CAMERA



FEATURES

- 2.0MP H.265 real-time coding
- 3D DNR, DWDR
- IR-Cut filter, Day&Night
- PoE power supply
- Lightning protection up to 6KV
- IP67 ingress protection
- IK10
- Support iOS/Android remote monitoring

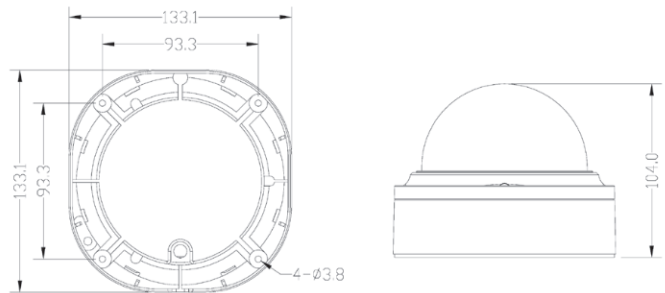

SPECIFICATIONS

| | |
|----------------------|--|
| Image Sensor | 2.0MP 1/2.9" Progressive Scan CMOS |
| Minimum Illumination | Color 0.01LUX / B&W 0.001LUX @ (F1.2, AGC ON); 0 Lux with IR |
| Shutter Time | 1/25s to 1/10,000s |
| Lens | 2.8 - 12 mm Varifocal |
| Lens Mount | Ø14 |
| Horizontal FOV | 30° - 105° |
| Digital NR | 3D DNR |
| IR Range | 20-30 m (30 - 50 m optional) |
| Resolution | 1080P, 1.3MP, 720P, D1, CIF |
| Ethernet | 1*10 / 100Mbs RJ45 ethernet port |
| Alarm Trigger | Motion detection, Private mask, Local alarm |
| Temperature | -30°C to 60°C |
| Humidity | 10% - 90% RH |
| Power Supply | DC 12 V 10% 2A, POE, 3W |
| Protection Level | IP67 |
| Weight | 360 g |
| Dimensions | Ø102 x 93.2 mm |

