


# SINGLE LANE PERSPEX FLAP BARRIER

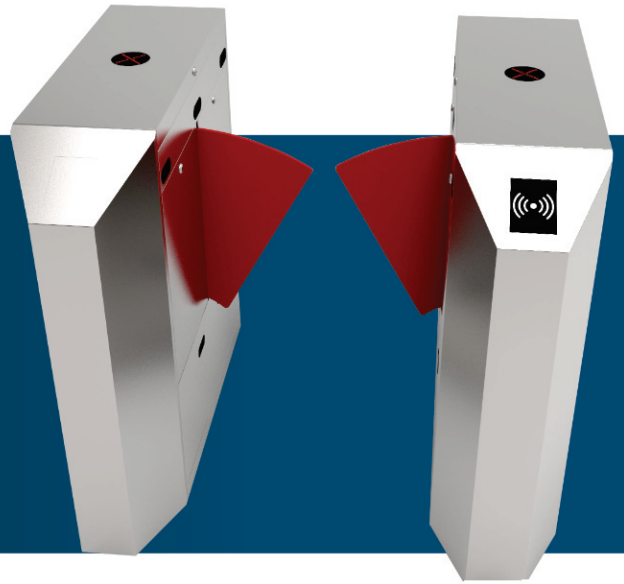

The Single Lane Flap Barrier with its stainless steel finish and Perspex barriers is ideal for managing access in a corporate environment, offering a more cost-effective alternative to glass. It is suitable for both indoor as well as outdoor use, if under cover.

## FEATURES

- During emergencies, the barriers will open automatically
- Stainless steel casework, acrylic barrier
- LCD on the flap barrier control board
- Wide lane width available

## SPECIFICATIONS

Power requirements	AC 100~120V/200~240V, 50/60Hz
Working Temperature	-28 °C ~ 60 °C
Working Humidity	5% - 80%
Speed	30 / Minute (card) or 25 / Minute (fingerprint)
Lane Width (mm)	600
Dimensions (mm)	1150 x 300 x 1000 (LxWxH)
Net Weight (kg)	119

